

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 January 2004 (08.01.2004)

PCT

(10) International Publication Number
WO 2004/003422 A1

(51) International Patent Classification⁷: **F16L 55/128**

(21) International Application Number:
PCT/NO2003/000204

(22) International Filing Date: 19 June 2003 (19.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20023099 26 June 2002 (26.06.2002) NO

(71) Applicant (for all designated States except US):
PLUGGING SPECIALISTS INTERNATIONAL
AS [NO/NO]; Fabrikkeveien 15, N-4033 Stavanger (NO).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SYSE, Harald**
[NO/NO]; Påskhusvegen 24, N-4052 Røyneberg (NO).

(74) Agent: **HÅMSØ PATENTBYRÅ ANS**; P.O. Box 171,
N-4302 Sandnes (NO).

(81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DEVICE FOR FASTENING A MANOEUVRABLE PLUG FOR PLUGGING OF PIPES

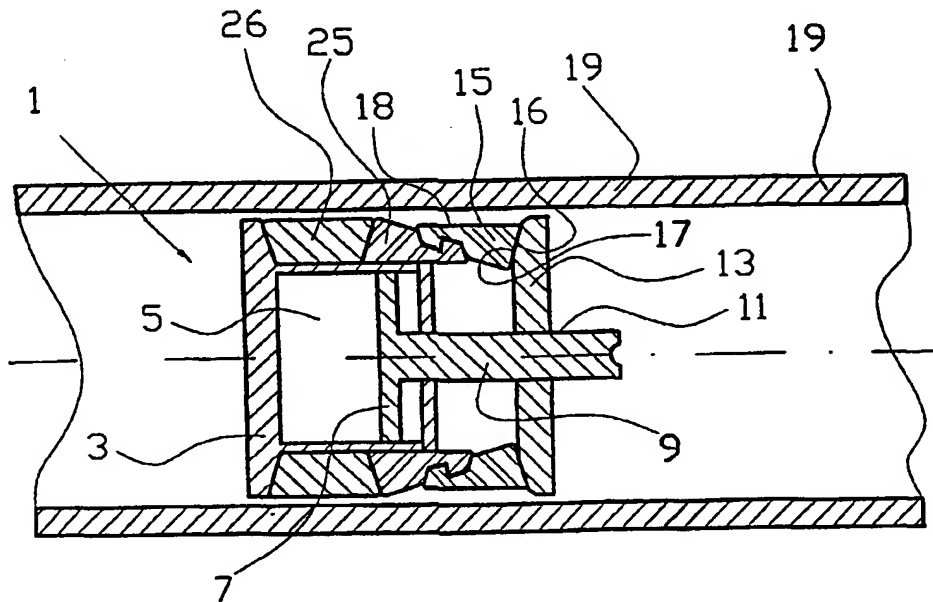

(57) Abstract: Arrangement at a plug for sealing liquid- or gas-carrying pipes, comprising several slips (15) arranged peripherally on the plug, so as to allow them to be pushed up along a conical force ring (25) by means of a hydraulic cylinder (5), where the slips (15) are provided with a possibly divided sliding surface (19, 19') and at least one possibly divided sliding surface (20, 23) having an angle that differs from the angle of the sliding surface (19, 19'). The force ring (25) has sliding surfaces (27, 29, 29', 31) that correspond to the sliding surfaces (19, 19', 20, 23) of the slips. The first part of the sliding surfaces (20, 23, 27, 31) has a steep gradient and the second part of the sliding surfaces (21, 21', 29, 29') has a small gradient.

WO 2004/003422 A1